


ZEETEX

BIAS RANGE



C-AUTO

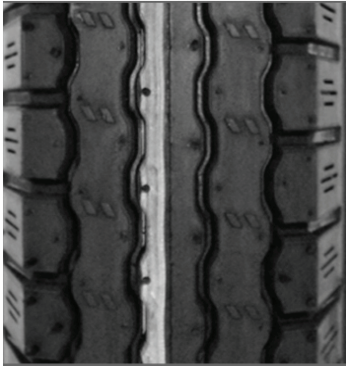

FEATURES:

- Reinforced Tyre Construction
- Higher dimensions
- Longer life
- Tall and functional look

Tyre Size	PR	Max Load		Pressure		Overall Diameter	Section Width	Tread Depth
		Single (kg)	Dual (kg)	Single (PSI)	Dual (PSI)			
4.00-8	6	400	N/A	61	N/A	418	110	9.0

C-SPEED



FEATURES:

- Reinforced Tyre Construction
- Higher dimensions
- Longer life
- Tall and functional look

Tyre Size	PR	Max Load		Pressure		Overall Diameter	Section Width	Tread Depth
		Single (kg)	Dual (kg)	Single (PSI)	Dual (PSI)			
4.00-8	6	400	N/A	62	N/A	423	112	9.0

C-MILER



FEATURES:

- Continuous shoulder ribs
- Well ventilated shoulder
- Higher retreadability
- Low heat generation

Tyre Size	PR	Max Load		Pressure		Overall Diameter	Section Width	Tread Depth
		Single (kg)	Dual (kg)	Single (PSI)	Dual (PSI)			
6.00-14	8	750	709	60	60	684	164	10.2
6.50-14	8							

C-RIB



FEATURES:

- Continuous shoulder ribs
- Well ventilated shoulder
- Higher retreadability
- Low heat generation

Tyre Size	PR	Max Load		Pressure		Overall Diameter	Section Width	Tread Depth
		Single (kg)	Dual (kg)	Single (PSI)	Dual (PSI)			
7.00-15	12	1175	1030	85	85	765	204	11.8
7.00-16	12	1230	1171	85	85	784	202	11.8
7.50-16	14	678	596	95	95	810	215	11.6
7.50-16	16	1580	1390	110	110	812	215	11.6

C-LUG



FEATURES:

- Tough casing
- Lug type tyre
- Multiple retreads
- Better traction

Tyre Size	PR	Max Load		Pressure		Overall Diameter	Section Width	Tread Depth
		Single (kg)	Dual (kg)	Single (PSI)	Dual (PSI)			
7.50-16	16	1550	1360	105	105	825	220	17.5

C-TURBO



FEATURES:

- Continues Shoulder Ribs
- Well ventilated shoulder
- Retreadability
- Low heat generation

Tyre Size	PR	Max Load		Pressure		Overall Diameter	Section Width	Tread Depth
		Single (kg)	Dual (kg)	Single (PSI)	Dual (PSI)			
8.25-20	14	2230	1960	115	105	988	242	14.0
9.00-20	16	2650	2325	115	105	1030	262	14.5

C-LT



FEATURES:

- Tough casing
- Lug type tyre
- Multiple retreads
- Better traction

Tyre Size	PR	Max Load		Pressure		Overall Diameter	Section Width	Tread Depth
		Single (kg)	Dual (kg)	Single (PSI)	Dual (PSI)			
9.00-20	16	2650	2325	115	105	1045	265	21.0

C-EXTRA



FEATURES:

- Continuous shoulder ribs
- Well ventilated shoulder
- Higher retreadability
- Low heat generation

Tyre Size	PR	Max Load		Pressure		Overall Diameter	Section Width	Tread Depth
		Single (kg)	Dual (kg)	Single (PSI)	Dual (PSI)			
10.00-20	16	2900	2575	110	105	1067	278	16.5

C-L40



FEATURES:

- Tough casing
- Lug type tyre
- Multiple retreads
- Better traction

Tyre Size	PR	Max Load		Pressure		Overall Diameter	Section Width	Tread Depth
		Single (kg)	Dual (kg)	Single (PSI)	Dual (PSI)			
10.00-20	16	2900	2575	110	105	1076	278	19.9

C-BLOCK



FEATURES:

- Tough nylon casing lug type tyre
- High loading capacity
- Multiple retreads
- Better traction and longer life

Tyre Size	PR	Max Load		Pressure		Overall Diameter	Section Width	Tread Depth
		Single (kg)	Dual (kg)	Single (PSI)	Dual (PSI)			
10.00-20	16	2900	2575	110	105	1071	274	19.6

C-BOLD



FEATURES:

- Tough nylon casing lug type tyre
- High loading capacity
- Multiple retreads
- Better traction and longer life

Tyre Size	PR	Max Load		Pressure		Overall Diameter	Section Width	Tread Depth
		Single (kg)	Dual (kg)	Single (PSI)	Dual (PSI)			
10.00-20	16	2900	2575	110	105	1079	279	20.6

CARGO MASTER




FEATURES:

- Continues Shoulder Ribs
- Well ventilated shoulder
- Retreadability
- Low heat generation

Tyre Size	PR	Max Load		Pressure		Overall Diameter	Section Width	Tread Depth
		Single (kg)	Dual (kg)	Single (PSI)	Dual (PSI)			
4.00-8	6	400	N/A	60	N/A	416	108	9.0
6.50-14	8	925	875	60	60	700	184	10.3
6.50-16	10	980	860	75	75	768	190	10.6
7.00-15	12	1175	1030	85	85	765	204	11.8
8.25-16	16	1845	1755	95	95	858	232	13.5
11.00-20	18	3250	2800	120	120	1094	299	15.7
12.00-20	18	3725	3265	115	105	1135	320	14.3



C-FARM

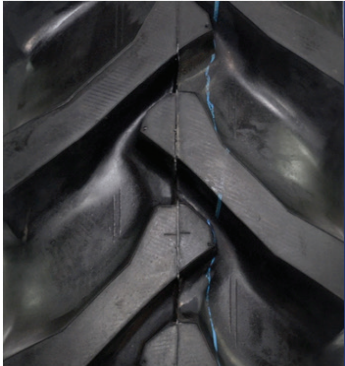

FEATURES:

- Strengthened construction
- Lug pattern
- Better load carrying capacity
- Better traction on field conditions

Tyre Size	PR	Max Load		Pressure		Overall Diameter	Section Width	Tread Depth
		Single (kg)	Dual (kg)	Single (PSI)	Dual (PSI)			
12.4-28	12	1650	N/A	38	N/A	1283	325	41.0





The legend is born.

Established in 2005, ZEETEX product portfolio comprises of tires, batteries & lubricants and offers over 400+ differentiated items for automotive industry. There are total of 322 items in the tire range, 62 sizes of batteries and 65 specifications of lubricants under the ZEETEX brand.

Offers everything under the sun.

ZEETEX is an international brand, designed and developed to cater to the customer needs in every tire category for all types of vehicles. Be it on or off-road driving, high speed highway drive or heavy duty industrial operations, ZEETEX has the solution.

Truly global, accepted everywhere.

ZEETEX provides the assurance of quality, safety and compliance with environment requirements. It has the following certifications: DOT (USA), E MARK (EUROPE), ECE (EUROPE), REACH (EUROPE), INMETRO (BRAZIL), GSO (GULF), SONCAP (NIGERIA).

Because customers love it.

If you are looking for safety, ride comfort, performance, low noise and at the same time an environment friendly solution, then ZEETEX is your choice. ZEETEX has unique patterns, provides better control, unmatched quality and assurance of safety. In short the ZEETEX brand provides the best value for money to the customers.



P.O. Box: 262176, Jebel Ali Free Zone (South). Dubai, U.A.E.

T :+971 4 886 2700. F: +971 4 886 2701

www.zafco.com | www.zeetex.com

Zeetex is a registered trademark